


22 外型尺寸與馬達齒鉤合方法

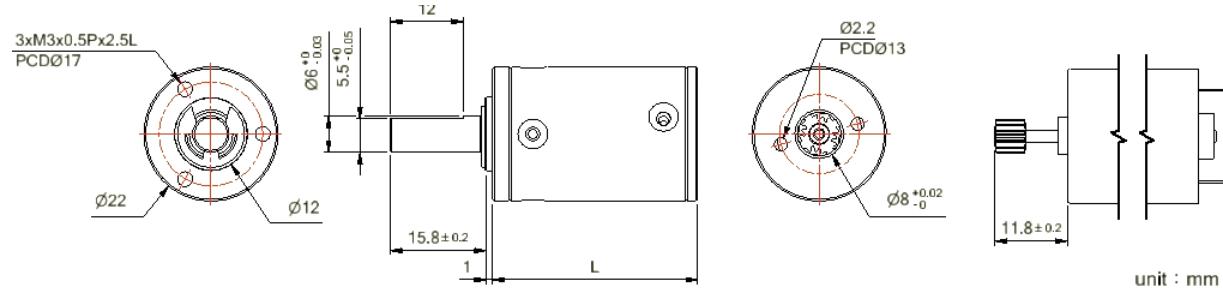

減速機性能資料

規格		1-Stage		2-Stage			3-Stage												
額定輸出力矩	Nm	比數	力矩	比數	力矩	比數	力矩	比數	力矩	比數	力矩								
		4	0.2	19	1	45	1	65	1.5	126	1.5								
		5	0.2	22	1			72	1.5	144	1.5								
		7	0.2	26	1			83	1.5	170	1.5								
				29	1			95	1.5	196	1.5								
				33	1			107	1.5	219	1.5								
最大加速力矩	Nm	1.5 倍額定輸出力矩																	
額定輸入轉速	rpm	5000		5000			5000												
最大加速輸入轉速	rpm	7000		7000			7000												
背隙(無負載時)	acrmin	≤30		≤45			≤65												
容許徑向力	N	90																	
容許軸向力	N	45																	
馬達齒輪孔徑	mm	2.0~3.0																	
長度(L)	mm	33.6		33.6			41												
效率	%	90		85			80												
重量	g	72		72			83												
使用溫度	°C	-10°C ~ +70°C																	
安裝方向		任意方向																	

此減速皆非為整數比